

Our eLight is a premium-quality outdoor lighting fixture that we have developed to wrap your garden, terrace or entrance area in a very special ambience. With a combination of noble design and state-of-the-art technology, the eLight fitsseamlessly into any environment - and also into your electrify charging infrastructure.

Advantages at a glance

High quality components

The optionally configurable sockets and switches are weatherproof (IP44), and thus ideally suited for outdoor use.

HIdeal complement

The lights harmonise perfectly with the electrify charging solutions.

Free choice of lamps

All illuminants in the size 60x110 mm E27 can be used. Replacement is possible at any time.

(+) Variable connection

Diverse connection variations for optimal integration of the eLight into existing systems.

Aesthetic design


With the discreet light strip and the high-quality stainless steel housing, the eLight is visually convincing all along the line.

High quality stainless steel

The thick-walled stainless steel housing and the high-quality work-manship of our lightings guarantee the highest quality.

Individually configurable

The eLight series offers a wide range of sizes and features and can be individually adapted and configured.

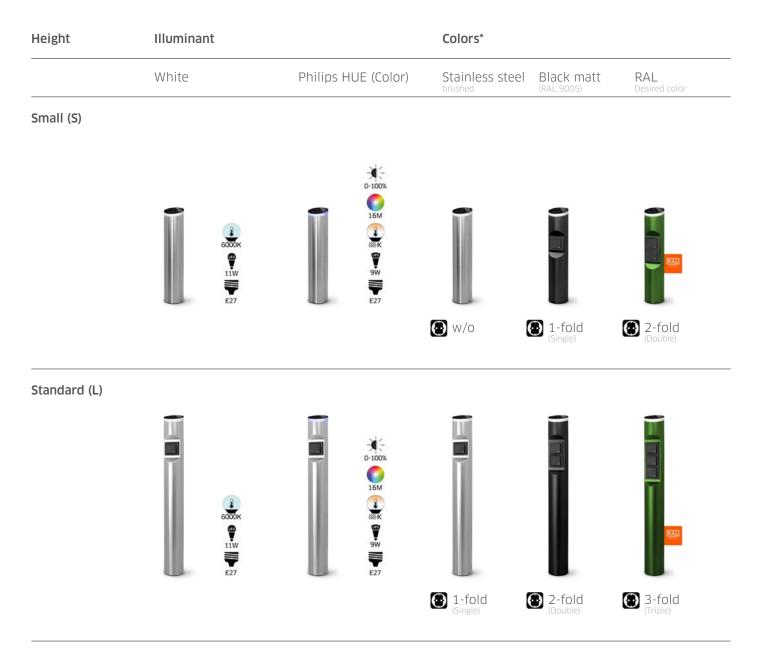

Colors*: Each colour variant can be combined with both light sources and with the socket options.



Simple and quick assembly

For the eLight series, we also use the push-in connection already evaluated for the charging solutions. The plug-in jumper system in the connection adapter enables an individually adaptable power supply for sockets and lighting.

| Color | Description | EAN | Item No. |
|-------|--|---|----------------------------------|
| | eLight White S Stainless steel eLight White S Black matt eLight White S RAL | 4260676733091 4260676733107 4260676733114 | 10259-01 10259-27 10259-31 |
| | eLight White S Single Stainless steel eLight White S Single Black matt eLight White S Single RAL | 4260676733084 4260676733121 4260676733138 | 10260-01 10260-27 10260-31 |
| | eLight White S Double Stainless steel eLight White S Double Black matt eLight White S Double RAL | 4260676733077 4260676733145 4260676733152 | 10261-01 10261-27 10261-31 |
| | eLight White L Single Stainless steel eLight White L Single Schwarz eLight White L Single RAL | 4260676733060 4260676733169 4260676733176 | 10262-01 10262-27 10262-31 |
| | eLight White L Double Stainless steel eLight White L Double Black matt eLight White L Double RAL | 4260676733053 4260676733183 4260676733190 | 10263-01 10263-27 10263-31 |
| | eLight White L Triple Stainless steel eLight White L Triple Black matt eLight White L Triple RAL | 4260676733046 4260676733206 4260676733213 | 10264-01 10264-27 10264-31 |

| Color | Description | EAN | Item No. |
|-------|--|---|----------------------------------|
| | eLight Color S Stainless steel eLight Color S Black matt eLight Color S RAL | 4260676733039 4260676733220 4260676733237 | 10265-01 10265-27 10265-31 |
| | eLight Color S Single Stainless steel eLight Color S Single Black matt eLight Color S Single RAL | 4260676733022 4260676733244 4260676733251 | 10266-01 10266-27 10266-31 |
| | eLight Color S Double Stainless steel eLight Color S Double Black matt eLight Color S Double RAL | 4260676733015 4260676733268 4260676733275 | 10267-01 10267-01 10267-31 |
| | eLight Color L Single Stainless steel eLight Color L Single Black matt eLight Color L Single RAL | 4260676733008 4260676733282 4260676733299 | 10268-01 10268-27 10268-31 |
| | eLight Color L Double Stainless steel eLight Color L Double Black matt eLight Color L Double RAL | 4260676732995 4260676733305 4260676733312 | 10269-01 10269-27 10269-31 |
| | eLight Color L Triple Stainless steel eLight Color L Triple Black matt eLight Color L Triple RAL | 4260676732988 4260676733329 4260676733336 | 10270-01 10270-27 10270-31 |



General technical details

Supply voltage 230 V **Rated current** max. 16 A

Connection typePush-in connectionWire cross section0.14 mm² - 4 mm²Wire cross section0.14 mm² - 2.5 mm²

with ferrule

Connection options Separate connection of sockets

and lighting possible by removing

the jumpers

Protective class 1

Socket E27 max. 4/250

Illuminant depending on version (60x110 mm)

Energy efficiency class F

Number of sockets depending on version (0 to 3 pcs.)

Theft protection Safety screws

Operating temperature -20 °C to +45 °C

Protection class IP44


MaterialVA 1.4301Material thickness2 mm

Dimensions of the eLight series


Small (S)




S Single



Standard (L)







L Double

L Triple

The millimetre specifications are valid for each colour and lamp variant.











hesotec electrify gmbh Rubbertskath 34 46539 Dinslaken Germany +49 (0) 2064 60 105-60 electrify@hesotec.de electrify.hesotec.de

